


PUSHBUTTON ENCLOSURES TYPE 12

These pushbutton enclosures are designed to hold 30.5-mm or 22.5-mm pushbuttons and switches.

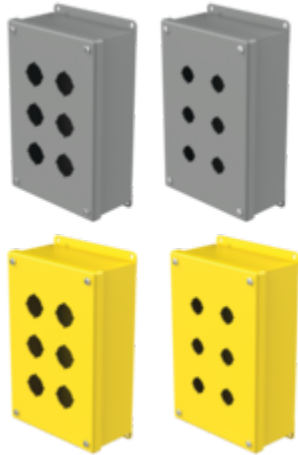

FEATURES & BENEFITS

Seams continuously welded and ground smooth

Captivated cover screws thread into sealed wells

Bonding provision on cover

Grounding stud on body

Oil-resistant gasket

Factory stamped 4-way pushbutton holes

Enclosures with more than one column of pushbutton holes have internal detachable hinge to hold cover open during wiring

External welded-on mounting brackets for easy installation

30.5-mm or 22.5-mm size holes

SPECIFICATIONS

Color Gray

Color Code ANSI 61

Finish Powder Coated

Table 1/2

Catalog Number	Height	Width	Depth	Protection Rating	Material	Hole Quantity
E10PBG	629 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	10
E10PB	629 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	10
E12PBG	298 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	12
E12PB	298 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	12
E16PBG	298 mm	273 mm	76 mm	NEMA Type 12; IP65	Mild Steel	16
E16PB	298 mm	273 mm	76 mm	NEMA Type 12; IP65	Mild Steel	16
E1PBG	89 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	1
E1PB	89 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	1
E2PBG	146 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	2
E2PB	146 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	2
E3PBG	203 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	3
E3PB	203 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	3
E4PBG	254 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	4
E4PB	254 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	4
E5PBG	318 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	5
E5PB	318 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	5
E6PBGVL	375 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	6
E6PBVL	375 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	6
E8PBG	514 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	8
E8PB	514 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	8
E9PBG	241 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	9
E9PB	241 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	9
E4SPBG	184 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	4
E4SPB	184 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	4
E6PBG	241 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	6
E6PB	241 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	6

Table 2/2

Catalog Number	Overall Dimensions	Mounting	Hole Size	Thickness
E10PBG	654 x 88 mm	641 x 60 mm	22.5 mm mm	1.9 mm
E10PB	654 x 88 mm	641 x 60 mm	30.5 mm mm	1.9 mm
E12PBG	324 x 221 mm	311 x 194 mm	22.5 mm mm	1.9 mm
E12PB	324 x 221 mm	311 x 194 mm	30.5 mm mm	1.9 mm

Catalog Number	Overall Dimensions	Mounting	Hole Size	Thickness
E16PBG	324 x 279 mm	311 x 251 mm	22.5 mm mm	1.9 mm
E16PB	324 x 279 mm	311 x 251 mm	30.5 mm mm	1.9 mm
E1PBG	114 x 88 mm	102 x 60 mm	22.5 mm mm	1.52 mm
E1PB	114 x 88 mm	102 x 60 mm	30.5 mm mm	1.52 mm
E2PBG	171 x 88 mm	159 x 60 mm	22.5 mm mm	1.52 mm
E2PB	171 x 88 mm	159 x 60 mm	30.5 mm mm	1.52 mm
E3PBG	229 x 88 mm	216 x 60 mm	22.5 mm mm	1.9 mm
E3PB	229 x 88 mm	216 x 60 mm	30.5 mm mm	1.9 mm
E4PBG	286 x 88 mm	273 x 60 mm	22.5 mm mm	1.9 mm
E4PB	286 x 88 mm	273 x 60 mm	30.5 mm mm	1.9 mm
E5PBG	343 x 88 mm	330 x 60 mm	22.5 mm mm	1.9 mm
E5PB	343 x 88 mm	330 x 60 mm	30.5 mm mm	1.9 mm
E6PBGVL	400 x 88 mm	387 x 60 mm	22.5 mm mm	1.9 mm
E6PBVL	400 x 88 mm	387 x 60 mm	30.5 mm mm	1.9 mm
E8PBG	540 x 88 mm	527 x 60 mm	22.5 mm mm	1.9 mm
E8PB	540 x 88 mm	527 x 60 mm	30.5 mm mm	1.9 mm
E9PBG	267 x 221 mm	254 x 194 mm	22.5 mm mm	1.9 mm
E9PB	267 x 221 mm	254 x 194 mm	30.5 mm mm	1.9 mm
E4SPBG	210 x 164 mm	197 x 137 mm	22.5 mm mm	1.9 mm
E4SPB	210 x 164 mm	197 x 137 mm	30.5 mm mm	1.9 mm
E6PBG	267 x 164 mm	254 x 137 mm	22.5 mm mm	1.9 mm
E6PB	267 x 164 mm	254 x 137 mm	30.5 mm mm	1.9 mm

Color Gray

Color Code ANSI 61

Finish Powder Coated

Table 1/2

Catalog Number	Height	Width	Depth	Protection Rating	Material	Hole Quantity
E10PBG	629 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	10
E10PB	629 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	10
E12PBG	298 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	12
E12PB	298 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	12

Catalog Number	Height	Width	Depth	Protection Rating	Material	Hole Quantity
E16PBG	298 mm	273 mm	76 mm	NEMA Type 12; IP65	Mild Steel	16
E16PB	298 mm	273 mm	76 mm	NEMA Type 12; IP65	Mild Steel	16
E1PBG	89 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	1
E1PB	89 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	1
E2PBG	146 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	2
E2PB	146 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	2
E3PBG	203 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	3
E3PB	203 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	3
E4PBG	254 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	4
E4PB	254 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	4
E5PBG	318 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	5
E5PB	318 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	5
E6PBGVL	375 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	6
E6PBVL	375 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	6
E8PBG	514 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	8
E8PB	514 mm	83 mm	70 mm	NEMA Type 12; IP65	Mild Steel	8
E9PBG	241 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	9
E9PB	241 mm	216 mm	76 mm	NEMA Type 12; IP65	Mild Steel	9
E4SPBG	184 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	4
E4SPB	184 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	4
E6PBG	241 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	6
E6PB	241 mm	159 mm	76 mm	NEMA Type 12; IP65	Mild Steel	6

Table 2/2

Catalog Number	Overall Dimensions	Mounting	Hole Size	Thickness
E10PBG	654 x 88 mm	641 x 60 mm	22.5 mm mm	1.9 mm
E10PB	654 x 88 mm	641 x 60 mm	30.5 mm mm	1.9 mm
E12PBG	324 x 221 mm	311 x 194 mm	22.5 mm mm	1.9 mm
E12PB	324 x 221 mm	311 x 194 mm	30.5 mm mm	1.9 mm
E16PBG	324 x 279 mm	311 x 251 mm	22.5 mm mm	1.9 mm
E16PB	324 x 279 mm	311 x 251 mm	30.5 mm mm	1.9 mm
E1PBG	114 x 88 mm	102 x 60 mm	22.5 mm mm	1.52 mm
E1PB	114 x 88 mm	102 x 60 mm	30.5 mm mm	1.52 mm
E2PBG	171 x 88 mm	159 x 60 mm	22.5 mm mm	1.52 mm

Catalog Number	Overall Dimensions	Mounting	Hole Size	Thickness
E2PB	171 x 88 mm	159 x 60 mm	30.5 mm mm	1.52 mm
E3PBG	229 x 88 mm	216 x 60 mm	22.5 mm mm	1.9 mm
E3PB	229 x 88 mm	216 x 60 mm	30.5 mm mm	1.9 mm
E4PBG	286 x 88 mm	273 x 60 mm	22.5 mm mm	1.9 mm
E4PB	286 x 88 mm	273 x 60 mm	30.5 mm mm	1.9 mm
E5PBG	343 x 88 mm	330 x 60 mm	22.5 mm mm	1.9 mm
E5PB	343 x 88 mm	330 x 60 mm	30.5 mm mm	1.9 mm
E6PBGVL	400 x 88 mm	387 x 60 mm	22.5 mm mm	1.9 mm
E6PBVL	400 x 88 mm	387 x 60 mm	30.5 mm mm	1.9 mm
E8PBG	540 x 88 mm	527 x 60 mm	22.5 mm mm	1.9 mm
E8PB	540 x 88 mm	527 x 60 mm	30.5 mm mm	1.9 mm
E9PBG	267 x 221 mm	254 x 194 mm	22.5 mm mm	1.9 mm
E9PB	267 x 221 mm	254 x 194 mm	30.5 mm mm	1.9 mm
E4SPBG	210 x 164 mm	197 x 137 mm	22.5 mm mm	1.9 mm
E4SPB	210 x 164 mm	197 x 137 mm	30.5 mm mm	1.9 mm
E6PBG	267 x 164 mm	254 x 137 mm	22.5 mm mm	1.9 mm
E6PB	267 x 164 mm	254 x 137 mm	30.5 mm mm	1.9 mm

2100 Hoffman Way
 Anoka, MN 55303-1745 | USA
 763.421.2240



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2022 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.
 nVent reserves the right to change specifications without notice.